


# Fil-Star Valve Cover Installation Guide

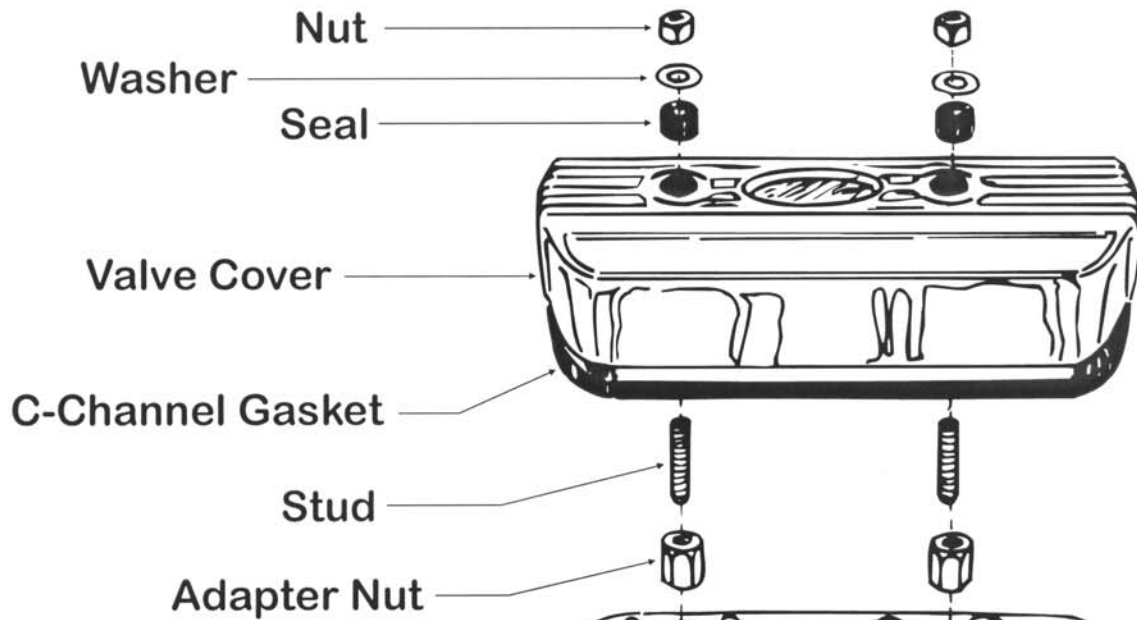

1. Replace stock rocker shaft nuts with new adapter nuts. Torque to 13 ft. lbs.

2. Screw 8mm studs into adapter nuts. Torque to 18 ft lbs.

3. Install rubber C-Channel Gasket on base lip of valve cover.

4. Push seals into valve cover stud holes.

5. Position valve cover on cylinder head.

6. Install 8mm washers and shake proof nuts. (Lightly tighten nuts until snug.)

7. Start engine and check for oil leaks.

**Note: Check Rocker Arm adjustments after replacing stock rocker shaft nuts with new adapter nuts.**

**cbperformance.com**

Phone: (559) 733-8222 Fax: (559) 733-7967  
Toll Free: 1-800-274-8337